

# WOODPECKER

NATURALLY INSPIRED FLOORING

## TECHNICAL DATA SHEET WEYMOUTH ECHO OAK


### PRODUCT DETAILS

|                         |                                   |
|-------------------------|-----------------------------------|
| PRODUCT CODE            | 34-WYO-004                        |
| CONSTRUCTION            | Natural mineral / resin composite |
| WEAR LAYER              | 0.5mm PU coated vinyl             |
| BACKING                 | Crosslinked microcellular foam    |
| THICKNESS               | 6mm                               |
| WIDTH                   | 180mm                             |
| LENGTH                  | 1180mm                            |
| PACK SIZE               | 2.124m <sup>2</sup>               |
| PLANKS PER PACK         | 10                                |
| FINISH                  | LiveTouch                         |
| JOINT TYPE              | Easiloc                           |
| END JOINT TYPE          | 5G                                |
| BEVELLED EDGES          | Deep bevels on long edges         |
| FIXING METHOD           | Floated                           |
| UNDERFLOOR HEATING      | Suitable                          |
| MOISTURE BARRIER        | Not Required                      |
| PERIMETER EXPANSION GAP | 2-3mm                             |
| SUBFLOOR TOLERANCE      | <3mm                              |



### TECHNICAL CRITERIA

|                            |              |
|----------------------------|--------------|
| FORMALDEHYDE EMISSION      | E1           |
| PENTACHLOROPHENOL EMISSION | Undetected   |
| WEAR RATING                | Class 32 AC4 |
| REACTION TO FIRE           | Dfl s1       |
| THERMAL CONDUCTIVITY       | 0.13W/mK     |
| DIMENSIONAL STABILITY      | 0.08%        |
| SHRINKAGE RATE 5-35C       | 0.01%        |
| IMPACT SOUND REDUCTION     | 19dB         |

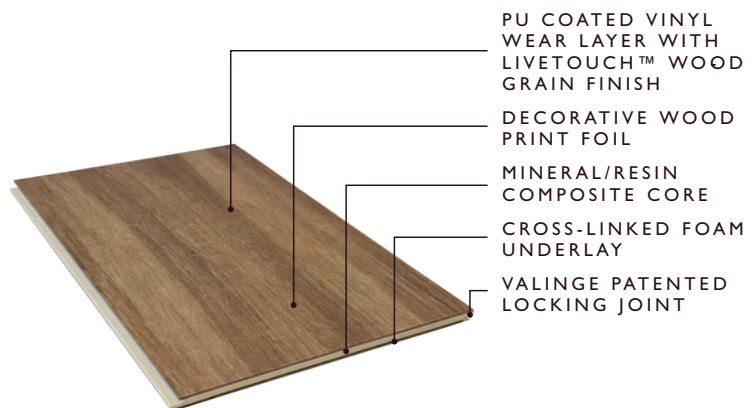

### SPECIFICATION DISCLAIMER

This technical data sheet was written by Woodpecker Flooring and at the time of writing and publication, all information was specified correctly. The company reserves the right to change specification without notice. Customers should confirm that the floor of their choice is still available with the specification shown.

Woodpecker House, 26 Pant Glas Industrial Estate, Bedwas, Caerphilly CF83 8DR

T: 02920 888 223 F: 02920 881 694 info@woodpeckerflooring.co.uk

WWW.WOODPECKERFLOORING.CO.UK

25  
YEARS  
WARRANTY


# WOODPECKER

NATURALLY INSPIRED FLOORING

## TECHNICAL DATA SHEET WEYMOUTH ECHO OAK


### PRODUCT DETAILS

|                         |                                   |
|-------------------------|-----------------------------------|
| PRODUCT CODE            | 34-WYO-020                        |
| CONSTRUCTION            | Natural mineral / resin composite |
| WEAR LAYER              | 0.5mm PU coated vinyl             |
| BACKING                 | Crosslinked microcellular foam    |
| THICKNESS               | 6mm                               |
| WIDTH                   | 228mm                             |
| LENGTH                  | 1180mm                            |
| PACK SIZE               | 2.15m <sup>2</sup>                |
| PLANKS PER PACK         | 8                                 |
| FINISH                  | LiveTouch                         |
| JOINT TYPE              | Easiloc                           |
| END JOINT TYPE          | 5G                                |
| BEVELLED EDGES          | Deep bevels on long edges         |
| FIXING METHOD           | Floated                           |
| UNDERFLOOR HEATING      | Suitable                          |
| MOISTURE BARRIER        | Not Required                      |
| PERIMETER EXPANSION GAP | 155.25 2-3mm                      |
| SUBFLOOR TOLERANCE      | <3mm                              |

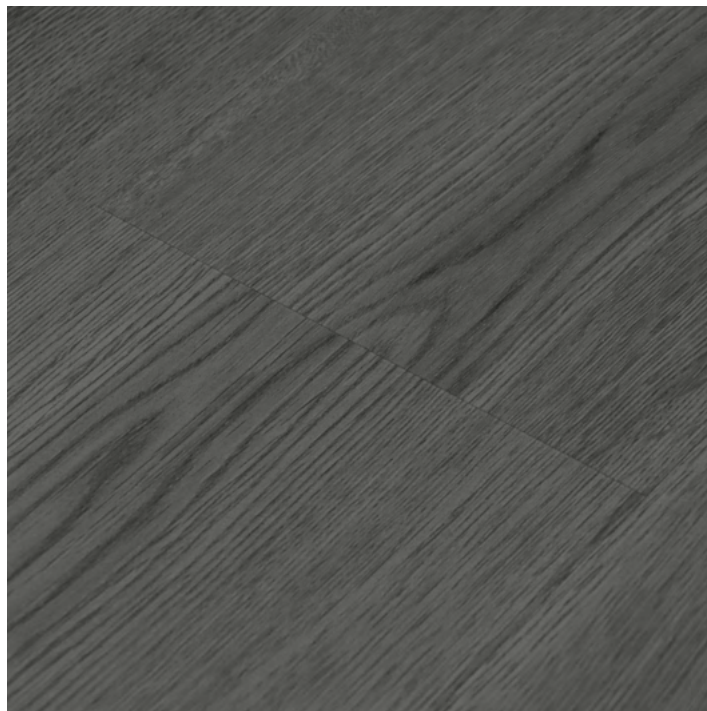

### TECHNICAL CRITERIA

|                            |              |
|----------------------------|--------------|
| FORMALDEHYDE EMISSION      | E1           |
| PENTACHLOROPHENOL EMISSION | Undetected   |
| WEAR RATING                | Class 32 AC4 |
| REACTION TO FIRE           | Dfl s1       |
| THERMAL CONDUCTIVITY       | 0.13W/mK     |
| DIMENSIONAL STABILITY      | 0.08%        |
| SHRINKAGE RATE 5-35C       | 0.01%        |
| IMPACT SOUND REDUCTION     | 19dB         |

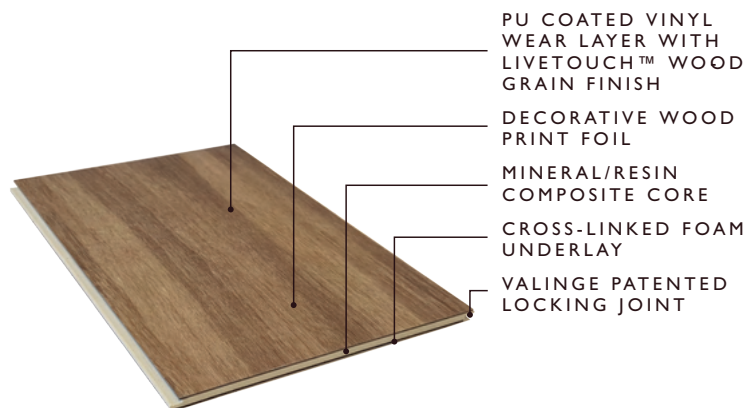

### SPECIFICATION DISCLAIMER

This technical data sheet was written by Woodpecker Flooring and at the time of writing and publication, all information was specified correctly. The company reserves the right to change specification without notice. Customers should confirm that the floor of their choice is still available with the specification shown.

Woodpecker House, 26 Pant Glas Industrial Estate, Bedwas, Caerphilly CF83 8DR

T: 02920 888 223 F: 02920 881 694 info@woodpeckerflooring.co.uk

WWW.WOODPECKERFLOORING.CO.UK

25  
YEARS  
WARRANTY