

# WOODPECKER

NATURALLY INSPIRED FLOORING

## TECHNICAL DATA SHEET WEYMOUTH MILLHOUSE OAK HERRINGBONE


### PRODUCT DETAILS

PRODUCT CODE .....	34-WYO-014
CONSTRUCTION .....	Natural mineral / resin composite
WEAR LAYER .....	0.5mm PU coated vinyl
BACKING .....	Crosslinked microcellular foam
THICKNESS .....	6mm
WIDTH .....	120mm
LENGTH .....	600mm
PACK SIZE .....	1.44m <sup>2</sup>
PLANKS PER PACK .....	20
FINISH .....	LiveTouch™
JOINT TYPE .....	Easiloc
END JOINT TYPE .....	.5G
BEVELLED EDGES .....	Bevel All 4 Edges
FIXING METHOD .....	Floated
UNDERFLOOR HEATING .....	Suitable
MOISTURE BARRIER .....	Not Required
PERIMETER EXPANSION GAP .....	2-3mm
SUBFLOOR TOLERANCE .....	<3mm



### TECHNICAL CRITERIA

FORMALDEHYDE EMISSION .....	E1
PENTACHLOROPHENOL EMISSION .....	Undetected
WEAR RATING .....	Class 32 AC4
REACTION TO FIRE .....	Dfl s1
THERMAL CONDUCTIVITY .....	0.13W/mK
DIMENSIONAL STABILITY .....	0.08%
SHRINKAGE RATE 5-35C .....	0.01%
IMPACT SOUND REDUCTION .....	19dB

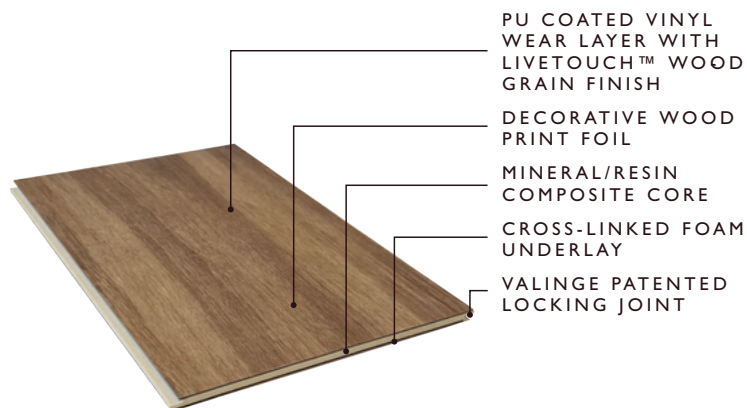

### SPECIFICATION DISCLAIMER

This technical data sheet was written by Woodpecker Flooring and at the time of writing and publication, all information was specified correctly. The company reserves the right to change specification without notice. Customers should confirm that the floor of their choice is still available with the specification shown.

Woodpecker House, 26 Pant Glas Industrial Estate, Bedwas, Caerphilly CF83 8DR

T: 02920 888 223 F: 02920 881 694 info@woodpeckerflooring.co.uk

WWW.WOODPECKERFLOORING.CO.UK

25  
YEARS  
WARRANTY