

WOODPECKER

NATURALLY INSPIRED FLOORING

TECHNICAL DATA SHEET BRECON RIVER HERRINGBONE OAK


PRODUCT DETAILS

PRODUCT CODE	29-BRE-017
CONSTRUCTION	Natural mineral / resin composite
WEAR LAYER	0.5mm PU coated vinyl
BACKING	Crosslinked microcellular foam
THICKNESS	5mm
WIDTH	180mm
LENGTH	1220mm
PACK SIZE	2.2m ²
PLANKS PER PACK	10
PACKS PER PALLET	60
FINISH	Embossed
JOINT TYPE	Easiloc
END JOINT TYPE	2G
BEVELLED EDGES	Micro-bevel on 4 sides
FIXING METHOD	Floating
UNDERFLOOR HEATING	Suitable
MOISTURE BARRIER	Not required
PERIMETER EXPANSION GAP	2-3mm
SUBFLOOR TOLERANCE	< 2mm



TECHNICAL CRITERIA

FORMALDEHYDE EMISSION	E1
PENTACHLOROPHENOL EMISSION	Undetected
WEAR RATING	Class 32 AC4
SLIP RESISTANCE	R10
REACTION TO FIRE	Dfl s1
THERMAL CONDUCTIVITY	Not Tested (NR)
DIMENSIONAL STABILITY	0.08%
SHRINKAGE RATE 5-35c	0.01% per m ² C
IMPACT SOUND REDUCTION	19dB
COLOUR FASTNESS TO LIGHT	> 6

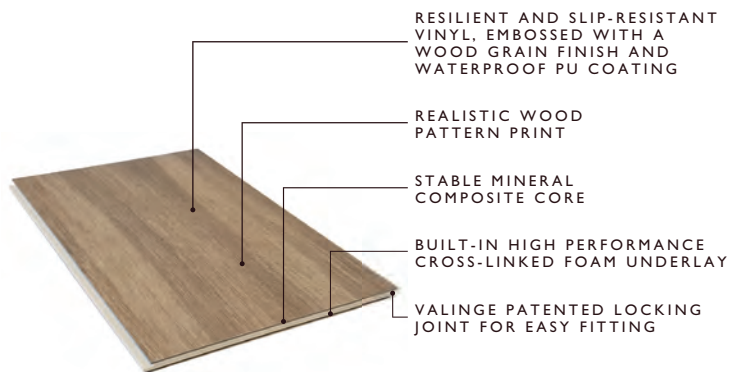

SPECIFICATION DISCLAIMER

This technical data sheet was written by Woodpecker Flooring and at the time of writing and publication, all information was specified correctly. The company reserves the right to change specification without notice. Customers should confirm that the floor of their choice is still available with the specification shown.

Woodpecker House, 26 Pant Glas Industrial Estate, Bedwas, Caerphilly CF83 8DR

T: 02920 888 223 F: 02920 881 694 info@woodpeckerflooring.co.uk

WWW.WOODPECKERFLOORING.CO.UK

25
YEARS
WARRANTY