

WOODPECKER

NATURALLY INSPIRED FLOORING

STRATEX® COLLECTION

EDITION 1 | MARCH 2026



WHY WOODPECKER?


At Woodpecker, wood is at the heart of everything we do. No one understands and cares about wood more than we do. With decades of expertise and a deep passion for craftsmanship, we've perfected floors that celebrate the natural beauty, warmth and character people love about timber.

That same attention to detail runs through our Stratex[®] wood-design floors, created to capture the look and feel of real wood in a floor that fits effortlessly into everyday life. Practical, durable and beautifully authentic, it's made to suit modern homes without losing that timeless Woodpecker charm.

STRATEX® FLOORING

Stratex® from Woodpecker is the best-looking and best performing alternative to real wood. With carefully crafted textures, grains, and tones, it is virtually indistinguishable from the real thing.

Made from five carefully engineered layers for best-in-class looks and performance:

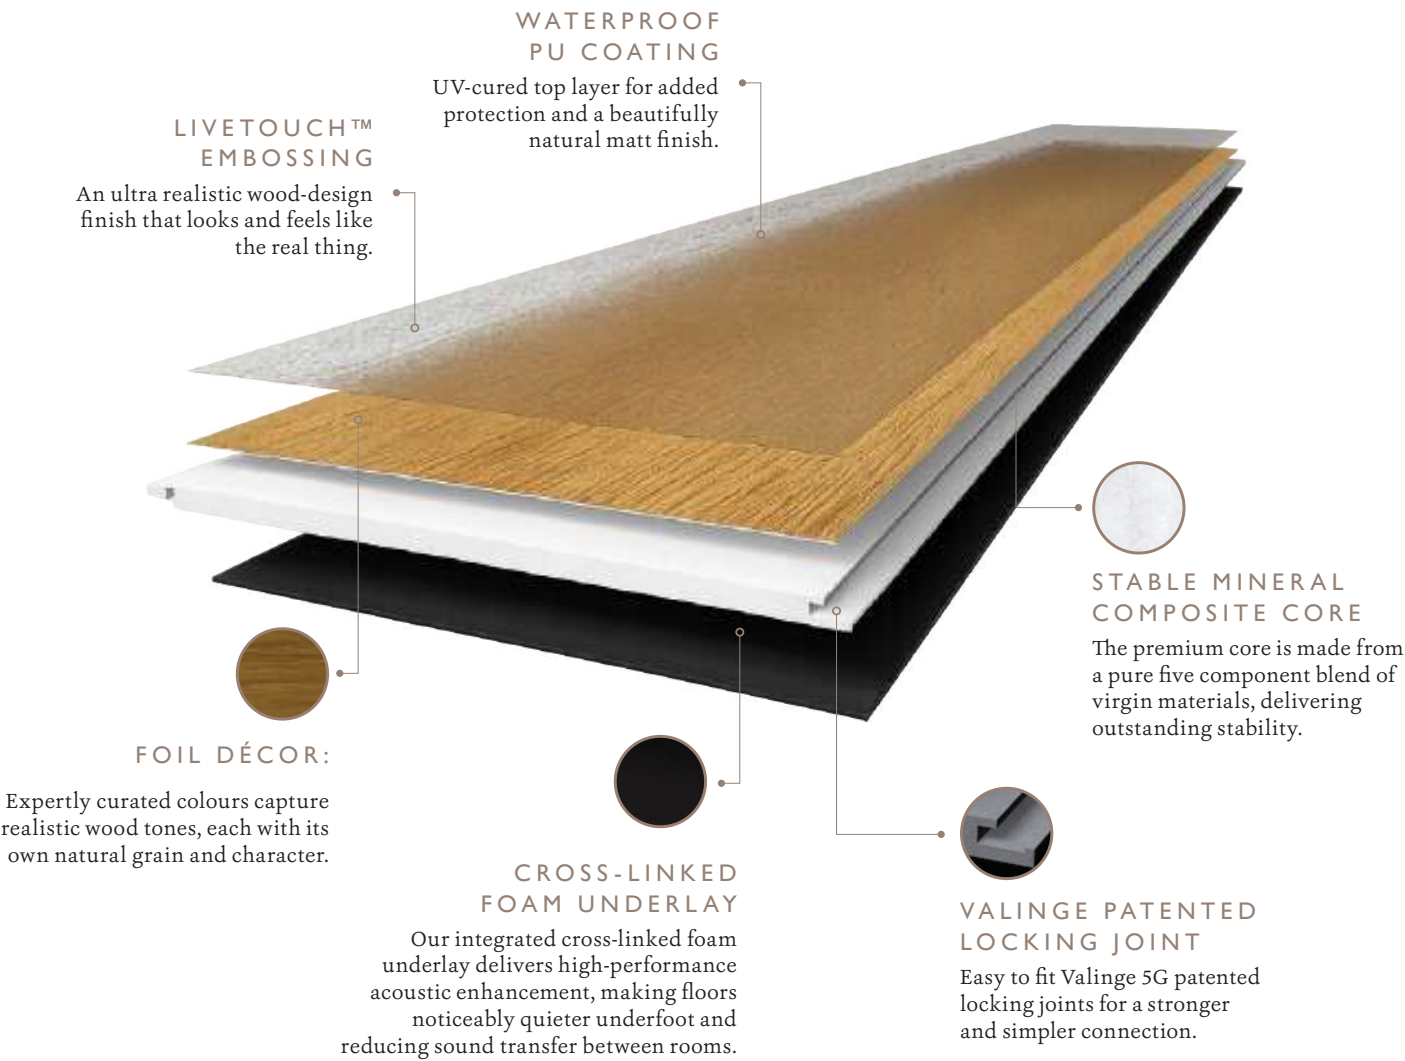

Weymouth and Warwick wood-design floors are our newest Stratex® ranges and the very best we offer. Virtually indistinguishable from real wood, they capture the true look and feel of timber through LiveTouch™ embossing that precisely follows the grain, bringing every board to life.

Waterproof and incredibly stable, they are our strongest, most realistic and highest performing option, designed to handle even the most challenging rooms and environments. Resilient, hardwearing and beautifully authentic while reflecting the quality and attention to detail Woodpecker is known for.



WHY STRATEX®

Highly stable, durable, easy to clean and maintain

AC4 WEAR RATING

WATERPROOF

R10 SLIP RESISTANCE

Quick and easy to install

SCORE & SNAP INSTALLATION

FITTING METHOD: FLOATED OVER MOST EXISTING SUBFLOORS

5G EASILOC

SUITABLE FOR UNDERFLOOR HEATING

Timeless realism, long-term confidence

LIVETOUCH™ TECHNOLOGY

25 YEAR WARRANTY

DESIGNED FOR REAL LIFE

Easy to live with and effortless to maintain, Stratex® floors are made to perform day after day. Waterproof, stain resistant and highly stable, they are suitable for all high-demand rooms in the home, except wetrooms.

Simple cleaning is all that's needed to keep the floor looking its best, with no sanding, sealing or specialist treatments required.

Use the specially formulated Woodpecker Cleaning Liquid for daily cleaning or, for a deeper clean, use a higher concentrated mix.

Our Cleaning Kit includes our specially formulated Cleaning Liquid and a gentle spray mop with refillable cartridge and washable cover.

For more maintenance tips, scan the QR code.



CODE	DESCRIPTION	SIZE
77-CKL-001	Cleaning Kit for Stratex® Floors	1L
77-CLC-001	Cleaning Liquid Refill for Stratex® Floors	1L





WEYMOUTH

Beautifully crafted and rich in detail,
made for elegant living spaces.

WOODPECKER

NATURALLY INSPIRED FLOORING



WEYMOUTH | SEAMIST OAK

LiveTouch™ Matt 180x1180mm 2.124m²/pack	34-WYO-001 £40m² inc VAT
LiveTouch™ Matt 228x1180mm 2.15m²/pack	34-WYO-017 £45m² inc VAT

A fresh modern tone, evoking glints of early morning sunshine filtering through drifting mist.



WEYMOUTH | ALASKAN OAK

LiveTouch™ Matt 180x1180mm 2.124m²/pack	34-WYO-003 £40m² inc VAT
LiveTouch™ Matt 228x1180mm 2.15m²/pack	34-WYO-019 £45m² inc VAT

Inspired by Northern landscapes, combining crisp highlights with subtle natural undertones.



WEYMOUTH | SEAMIST OAK
HERRINGBONE

LiveTouch™ Matt 120x600mm 1.44m²/pack	34-WYO-009 £45m² inc VAT
--	-----------------------------



WEYMOUTH | ALASKAN OAK
HERRINGBONE

LiveTouch™ Matt 120x600mm 1.44m²/pack	34-WYO-011 £45m² inc VAT
--	-----------------------------

JOINT TYPE



Easiloc

UNDERLAY



Built-in Underlay

FITTING METHOD



Floated

WATERPROOF



HEATING



Underfloor



Tog Rating

THICKNESS



6mm

WARRANTY



25 YEARS

WOODPECKER

NATURALLY INSPIRED FLOORING



WEYMOUTH | SHOREWOOD OAK

LiveTouch™ Matt 180x1180mm 2.124m²/pack	34-WYO-005 £40m² inc VAT
LiveTouch™ Matt 228x1180mm 2.15m²/pack	34-WYO-021 £45m² inc VAT

Like driftwood, worn by the sun, sea and salt, bringing natural tones to the heart of your home.



WEYMOUTH | ECHO OAK

LiveTouch™ Matt 180x1180mm 2.124m²/pack	34-WYO-004 £40m² inc VAT
LiveTouch™ Matt 228x1180mm 2.15m²/pack	34-WYO-020 £45m² inc VAT

Deep grey hues and moody accents create a complex and characterful multi-tonal board.



WEYMOUTH | SHOREWOOD OAK HERRINGBONE

LiveTouch™ Matt 120x600mm 1.44m²/pack	34-WYO-013 £45m² inc VAT
--	-----------------------------



WEYMOUTH | ECHO OAK HERRINGBONE

LiveTouch™ Matt 120x600mm 1.44m²/pack	34-WYO-012 £45m² inc VAT
--	-----------------------------

STABILITY

High

UNDERLAY

Built in Underlay

SLIP RESISTANCE

R10

WEAR RATING

AC4

WATERPROOF

INSTALLATION

Score and snap

JOINT TYPE

Easiloc

FITTING METHOD

Floated

HEATING

Underfloor | Tog Rating 0.5

THICKNESS

6mm

WARRANTY

25 YEARS

WOODPECKER
NATURALLY INSPIRED FLOORING



WEYMOUTH | ALMOND OAK

LiveTouch™ Matt 180x1180mm 2.124m²/pack	34-WYO-002 £40m² inc VAT
LiveTouch™ Matt 228x1180mm 2.15m²/pack	34-WYO-018 £45m² inc VAT

Warm and comforting, this toasty board feels as homely and welcoming as freshly baked bread.



WEYMOUTH | MALTED OAK

LiveTouch™ Matt 180x1180mm 2.124m²/pack	34-WYO-007 £40m² inc VAT
LiveTouch™ Matt 228x1180mm 2.15m²/pack	34-WYO-023 £45m² inc VAT

Full of personality and classic oak character, with an aged feel offset by hints and swirls of cream.

WOODPECKER
NATURALLY INSPIRED FLOORING



WEYMOUTH | MILLHOUSE OAK

LiveTouch™ Matt 180x1180mm 2.124m²/pack	34-WYO-006 £40m² inc VAT
LiveTouch™ Matt 228x1180mm 2.15m²/pack	34-WYO-022 £45m² inc VAT

An autumnal favourite, rich in rustic oak tones and inspired by traditional crafts and heritage.



WEYMOUTH | VINE OAK

LiveTouch™ Matt 180x1180mm 2.124m²/pack	34-WYO-008 £40m² inc VAT
LiveTouch™ Matt 228x1180mm 2.15m²/pack	34-WYO-024 £45m² inc VAT

Warming antique hints and hues, reminiscent of the timeworn floors of graceful manor houses.



WEYMOUTH | ALMOND OAK HERRINGBONE

LiveTouch™ Matt 120x600mm 1.44m²/pack	34-WYO-010 £45m² inc VAT
--	-----------------------------



WEYMOUTH | MALTED OAK HERRINGBONE

LiveTouch™ Matt 120x600mm 1.44m²/pack	34-WYO-015 £45m² inc VAT
--	-----------------------------



WEYMOUTH | MILLHOUSE OAK HERRINGBONE

LiveTouch™ Matt 120x600mm 1.44m²/pack	34-WYO-014 £45m² inc VAT
--	-----------------------------



WEYMOUTH | VINE OAK HERRINGBONE

LiveTouch™ Matt 120x600mm 1.44m²/pack	34-WYO-016 £45m² inc VAT
--	-----------------------------

STABILITY



High

UNDERLAY



Built in Underlay

SLIP RESISTANCE



R10

WEAR RATING



AC4

WATERPROOF



INSTALLATION



Score and snap

JOINT TYPE



Easiloc

FITTING METHOD



Floated

HEATING



Underfloor | Tog Rating

THICKNESS



6mm

WARRANTY



25 YEARS



WARWICK

Striking statement design panels, guaranteed to elevate interiors with instant sophistication.

WOODPECKER

NATURALLY INSPIRED FLOORING



WARWICK | EMRYS OAK

LiveTouch™ Matt
600x600mm | 2.16m²/pack

34-WCK-002
£60m² inc VAT

An elegant blend of beautiful tones enhanced to reflect the subtle maturing of natural oak.



WARWICK | CREST OAK

LiveTouch™ Matt
600x600mm | 2.16m²/pack

34-WCK-001
£60m² inc VAT

A sumptuous grey oak panel, aged and darkened to add depth and interest to any design scheme.



WARWICK | SLADE OAK

LiveTouch™ Matt
600x600mm | 2.16m²/pack

34-WCK-003
£60m² inc VAT

A timeless classic, bringing to life the character of limed and washed oak in a statement design.



WARWICK | HAZELNUT OAK

LiveTouch™ Matt
600x600mm | 2.16m²/pack

34-WCK-004
£60m² inc VAT

A graceful coming together of rich and burnished hues, enhanced by light playing across the grain.

JOINT TYPE



Easiloc

UNDERLAY



Built-in Underlay

FITTING METHOD



Floated

WATERPROOF



HEATING



Underfloor



Tog Rating

THICKNESS



7mm

WARRANTY



25 YEARS





WHITBY

Bold stone-design tiles that bring effortless style and contemporary feel to modern interiors.

WOODPECKER

NATURALLY INSPIRED FLOORING



WHITBY | DEW TILE

Deep Emboss Matt 305x610mm 2.233m ² /pack	34-WBY-001 £45m ² inc VAT
---	---

Understated and sophisticated, this light concrete effect tile harmonises perfectly in any room.



WHITBY | CHARCOAL TILE

Deep Emboss Matt 305x610mm 2.233m ² /pack	34-WBY-002 £45m ² inc VAT
---	---

A darker concrete effect tile which anchors design schemes both modern and traditional.



WHITBY | SILVERMIST TILE

Deep Emboss Matt 305x610mm 2.233m ² /pack	34-WBY-003 £45m ² inc VAT
---	---

Reflecting the eternal elegance of marble, natural veins and swirls mingle with reflected light.



WHITBY | RIMEFROST TILE

Deep Emboss Matt 305x610mm 2.233m ² /pack	34-WBY-004 £45m ² inc VAT
---	---

Darkness and light play across this classic design of deep marble laced with strands of brightness.

JOINT TYPE

Easiloc

UNDERLAY

Built-in Underlay

FITTING METHOD

Floated

WATERPROOF

HEATING

Underfloor
Tog Rating 0.5

THICKNESS

6mm

WARRANTY



25 YEARS

FINISHING TOUCHES

These trims are available in a range of colours and lengths to provide a contemporary finish to your stylish floor.

COMBI TRIM TWIN/RAMP


This innovative trim can be used both as a twin and a ramp profile, giving a seamless transition between floors of equal and uneven heights. Available in 3 contemporary finishes, they bridge the gap between flooring types and serve as neat room dividers.

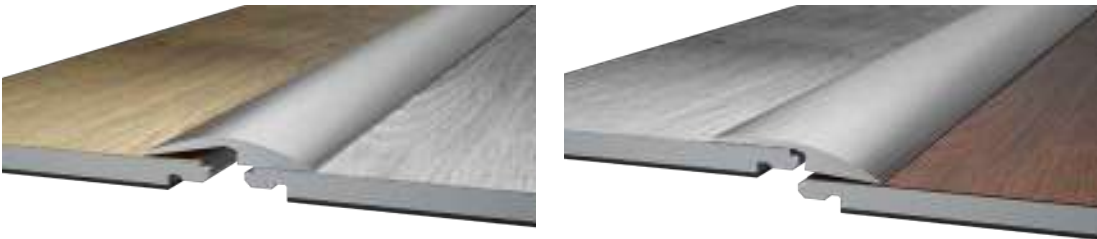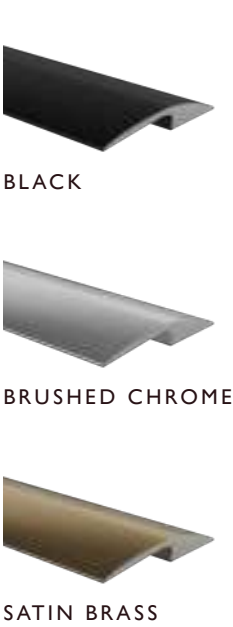

WOODPECKER CODE	COLOUR	FINISH	LENGTH
40-RTP-003	Black	Matt	0.9
40-RTP-006	Black	Matt	1.8
40-RTP-001	Brushed Chrome	Brushed and Polished	0.9
40-RTP-004	Brushed Chrome	Brushed and Polished	1.8
40-RTP-002	Satin Brass	Brushed and Polished	0.9
40-RTP-005	Satin Brass	Brushed and Polished	1.8

COMBI TRIM EDGE/NOSING

This versatile trim can be used as both a robust and stylish stair nosing, as well as a neat edge finish for when the floor has a visible end point, such as at mat wells and patio doors.

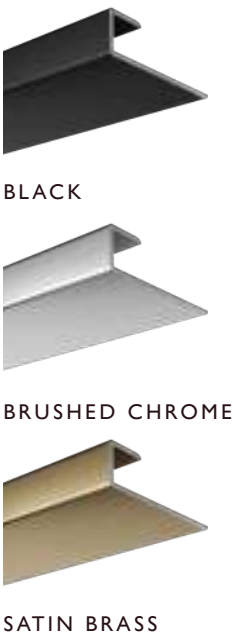

WOODPECKER CODE	COLOUR	FINISH	LENGTH
40-ENP-003	Black	Matt	0.9
40-ENP-006	Black	Matt	1.8
40-ENP-001	Brushed Chrome	Brushed and Polished	0.9
40-ENP-004	Brushed Chrome	Brushed and Polished	1.8
40-ENP-002	Satin Brass	Brushed and Polished	0.9
40-ENP-005	Satin Brass	Brushed and Polished	1.8

PREPARATION

BEFORE DELIVERY
Prior to delivery, ensure that all remedial works have been fully completed. The building must be adequately protected from external environmental elements that could adversely affect the installation process.

Room temperature and humidity must remain stable before, during, and after installation. Heating or air-conditioning systems should be operational for a minimum of two weeks, to establish a consistent environment. Where underfloor heating is installed, it must be fully commissioned in advance and then switched off at least 48 hours before installation.

SUBFLOOR
The subfloor must be structurally sound, dry and free from dust, debris, or any form of contamination. It should exhibit a maximum deviation of no more than 3 mm over a 2-metres (SR-1.) All hot pipes must be thoroughly insulated to eliminate the risk of localised hotspots, which may lead to warping or shrinkage.

SUBFLOOR REMEDIAL WORK
If remedial work to the subfloor is required, a suitable levelling compound must be applied to achieve a flat, even surface.

Moisture is the primary cause of failure in resilient flooring systems. Even when a subfloor appears dry, excess moisture may still be present within the substrate. It is therefore essential that moisture levels are assessed using a professional moisture meter.

Acceptable moisture readings must not exceed:

- 75% Relative Humidity (RH) for cement-based subfloors, in accordance with BS 8203:2017.
- 11% Wood Moisture Equivalent (WME) for timber subfloors, joists, or other wooden substrates.

Note:
All subfloor preparation must comply with the relevant industry standards outlined in BS 8203:2017.

ATMOSPHERIC CONDITIONS

- Room temperature 18-27°C.
- Floor temperature must be above 10°C.
- Humidity 40-60%RH.

INSTALLATION

LAYING THE FLOOR
For the best results, we recommend using an experienced installer.

When installing a new floor directly over existing sound, flat floorboards, the new planks should always run perpendicular to the direction of the existing boards.

FLOATING
A floating floor is installed by laying the boards over the subfloor without fixing with nails, screws, or adhesive. This method is suitable for a wide range of subfloors including; concrete, cement based screeds, anhydrite screeds, ceramic tiles (max grout width of 3mm), chipboard, existing PVC bonded floorcoverings and linoleum. Existing floorcoverings must be assessed and deemed suitable prior to overlaying. All forms of textile floorcoverings must be removed and are not suitable for overlaying.

It is important to note that heavy, fixed furniture should not be placed on top of a floating floor after installation. Built-in units, kitchen islands, fitted wardrobes and other fixed structures must be installed first, with the flooring fitted around them.

The advanced locking mechanism is designed to connect smoothly and securely. If a board does not lock into place, inspect the joint for any debris, unevenness, or obstruction within the click profile. Remove the obstruction, realign the board, and attempt the connection again.

EXPANSION GAPS
The floor will naturally move with fluctuating temperature and humidity changes within an environment. To accommodate this movement, a sufficient expansion gap of 5mm must be accommodated around the perimeter and all fixed objects.

Use the following guidance to determine the correct spacing:

- Floors manufactured with Stratex® technology require an expansion gap in all areas where temperatures remain within normal living conditions of 18°C to 27°C. In areas subject to higher or more frequent temperature fluctuations, additional expansion allowance must be provided to ensure the floor can move freely and to prevent stress or deformation.
- Existing skirting boards can be left in place, provided the floorcovering is installed up to them with the required expansion gap. Any new skirting boards fitted after installation must be fixed to the wall, not the floor, so they do not restrict or trap the floorcovering and allow it to move freely.

For more installation advice, scan the QR code or contact us on 02920 888 223.



PLEASE HELP US CARE FOR
THE ENVIRONMENT BY
SHARING OR RECYCLING
THIS WHEN YOU ARE DONE



WOODPECKER

NATURALLY INSPIRED FLOORING

Woodpecker House,
26 Pant Glas Industrial Estate,
Bedwas, Caerphilly
CF83 8DR

T: 02920 888 223

F: 02920 881 694

info@woodpeckerflooring.co.uk
www.woodpeckerflooring.co.uk

