


WOODPECKER

NATURALLY INSPIRED FLOORING

TECHNICAL DATA SHEET LYNTON CHIFFON OAK

PRODUCT DETAILS

PRODUCT CODE	33-LDC-100
CONSTRUCTION	Natural mineral / resin composite
WEAR LAYER	1mm Oak
BACKING	Crosslinked microcellular foam
THICKNESS	7mm
WIDTH	165mm
LENGTH	1220mm
PACK SIZE	2.01m ²
PLANKS PER PACK	10
GRADE	Rustic
FINISH	Brushed & Matt Lacquered
JOINT TYPE	Easiloc
END JOINT TYPE	2G
BEVELLED EDGES	Micro Bevel All 4 Edges
FIXING METHOD	Floated
UNDERFLOOR HEATING	Suitable
MOISTURE BARRIER	Not Required
PERIMETER EXPANSION GAP	2-3mm
SUBFLOOR TOLERANCE	<2mm

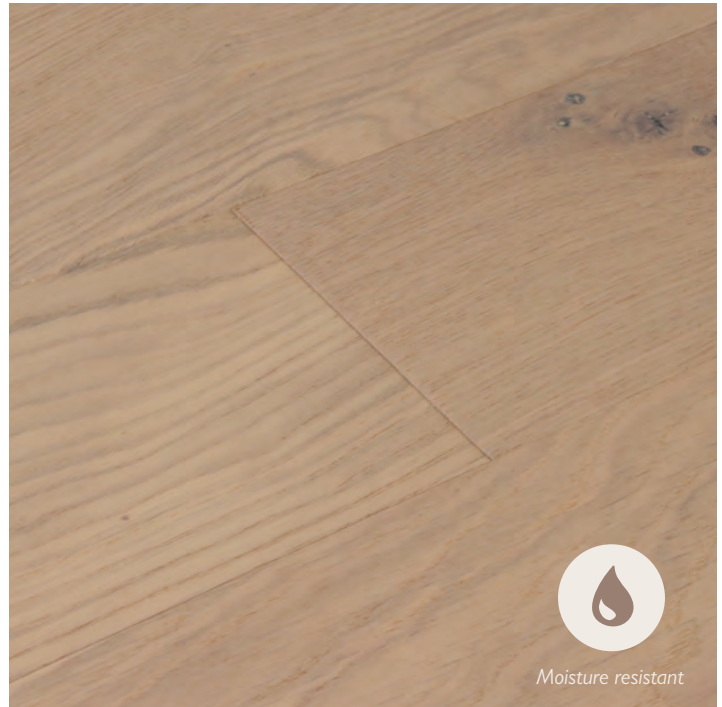

TECHNICAL CRITERIA

FORMALDEHYDE EMISSION	E1
PENTACHLOROPHENOL EMISSION	Undetected
REACTION TO FIRE	Dfl s1
THERMAL CONDUCTIVITY	Not Tested
DIMENSIONAL STABILITY	0.08%
SHRINKAGE RATE 5-35C	0.01%
IMPACT SOUND REDUCTION	19dB

GRADING CRITERIA

MAXIMUM SIZE OF SOUND KNOTS	50mm
MAXIMUM SIZE OF DEAD KNOTS	30mm
HEARTWOOD	Allowed
SAPWOOD	Allowed
INSECT HOLES	Not Allowed
FILLER	Allowed
COLOUR VARIATION	Allowed
SMALL CRACKS	Allowed
ROT	Not Allowed

SPECIFICATION DISCLAIMER

This technical data sheet was written by Woodpecker Flooring and at the time of writing and publication, all information was specified correctly. The company reserves the right to change specification without notice. Customers should confirm that the floor of their choice is still available with the specification shown.

Woodpecker House, 26 Pant Glas Industrial Estate, Bedwas, Caerphilly CF83 8DR

T: 02920 888 223 F: 02920 881 694 info@woodpeckerflooring.co.uk

WWW.WOODPECKERFLOORING.CO.UK

25
YEARS
WARRANTY