# WOODPECKER

### TRADE

# TECHNICAL DATA SHEET WHITBY CHARCOAL TILE

#### PRODUCT DETAILS PRODUCT CODE 34-WBY-002 CONSTRUCTION Natural mineral / resin composite WEAR LAYER. 0.5mm PU coated vinyl BACKING. Crosslinked microcellular foam **THICKNESS** WIDTH. 305mm LENGTH 610mm PACK SIZE. 2.233m<sup>2</sup> PLANKS PER PACK ...12 PACKS PER PALLET **FINISH** Deep Embossed JOINT TYPE. Easiloc **END JOINT TYPE BEVELLED EDGES** Micro bevels on all edges FIXING METHOD Floating **UNDERFLOOR HEATING** Suitable **MOISTURE BARRIER** ..... Not required




## TECHNICAL CRITERIA

PERIMETER EXPANSION GAP

SUBFLOOR TOLERANCE

| FORMALDEHYDE EMISSION      | EI              |
|----------------------------|-----------------|
| PENTACHLOROPHENOL EMISSION | Undetected      |
| WEAR RATING                |                 |
| SLIP RESISTANCE            | R10             |
| REACTION TO FIRE           | Dfl sl          |
| THERMAL CONDUCTIVITY       | Not Tested (NR) |
| DIMENSIONAL STABILITY      | 0.08%           |
| SHRINKAGE RATE 5-35c       | 0.01% per m/°C  |
| IMPACT SOUND REDUCTION     | 19dB            |
| COLOUR FASTNESS TO LIGHT   | >6              |
|                            |                 |

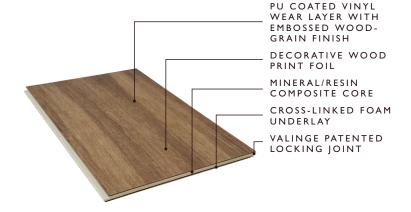

#### SPECIFICATION DISCLAIMER

This technical data sheet was written by Woodpecker Flooring and at the time of writing and publication, all information was specified correctly. The company reserves the right to change specification without notice. Customers should confirm that the floor of their choice is still available with the specification shown.

Woodpecker House, 26 Pant Glas Industrial Estate, Bedwas, Caerphilly CF83 8DR **T**: 02920 888 223 **F**: 02920 881 694 info@woodpeckerflooring.co.uk

2-3mm

<3mm

