

WOODPECKER


TRADE

TECHNICAL DATA SHEET

CLASSIC CANDIED OAK HERRINGBONE


PRODUCT DETAILS

PRODUCT CODE	83-TRD-031
CONSTRUCTION	Engineered
SPECIES	Oak
WEAR LAYER	3mm
BACKING	Multiplex Ply
THICKNESS	14mm
WIDTH	130mm
LENGTH	650mm
PACK SIZE	1.69m ²
PLANKS PER PACK	20
GRADE	Rustic
PACKS PER PALLET	54
FINISH	Oiled (UV cured)
JOINT TYPE	Easiloc
END JOINT TYPE	5G
BEVELLED EDGES	Micro bevel, all 4 Edges
FIXING METHOD	Floated
UNDERFLOOR HEATING	Suitable
TOG RATING	1.13

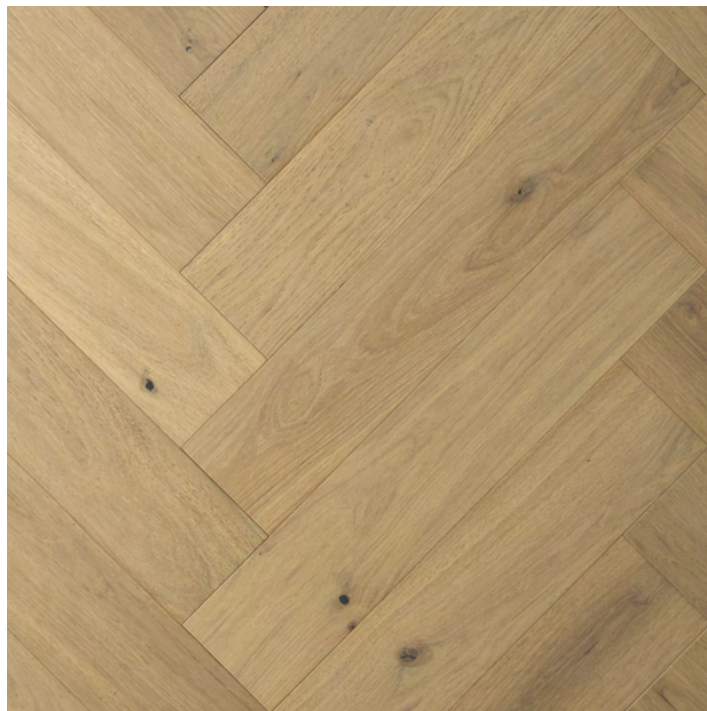

TECHNICAL CRITERIA

MATERIAL ORIGIN	Europe
RESPONSIBLE CERTIFICATION	FSC(R)
JANKA HARDNESS RATING	1,360 lbf (6000N)
FORMALDEHYDE EMISSION	E1
REACTION TO FIRE	Dfl s1
THERMAL CONDUCTIVITY	0.143 W/mK

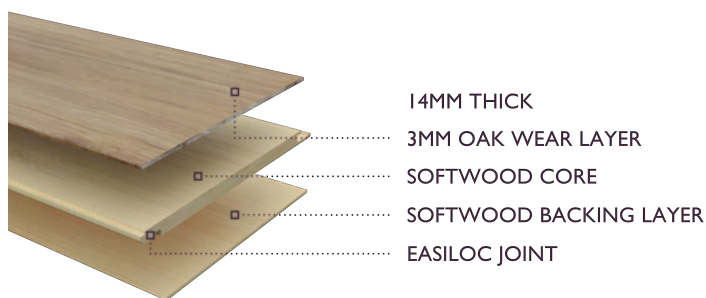

SPECIFICATION DISCLAIMER

This technical data sheet was written by Woodpecker Flooring and at the time of writing and publication, all information was specified correctly. The company reserves the right to change specification without notice. Customers should confirm that the floor of their choice is still available with the specification shown.

Woodpecker House, 26 Pant Glas Industrial Estate, Bedwas, Caerphilly CF83 8DR

T: 02920 888 223 F: 02920 881 694 info@woodpeckerflooring.co.uk

WWW.WOODPECKERTRADE.CO.UK

20
YEARS
WARRANTY